

INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: 2CA51E4F-253D-4BB1-97AA-5D35146BDA61

VEHICLE

BRAND: Tesla
MODEL: Model Y - 60,5 kWh

MILEAGE: 39,602 km
VIN: LRWYHCFS3PC903870

EXECUTED BY: Carma

DATE AND TIME:
01/07/2026, 09:08

RESULTS

Independent
STATE OF HEALTH (SOH)

94.1 %

ENERGY 57kWh | 61kWh




WLTP RANGE 470km | 500km

RATING

BENCHMARKING

How does your vehicle compare to comparable vehicles?

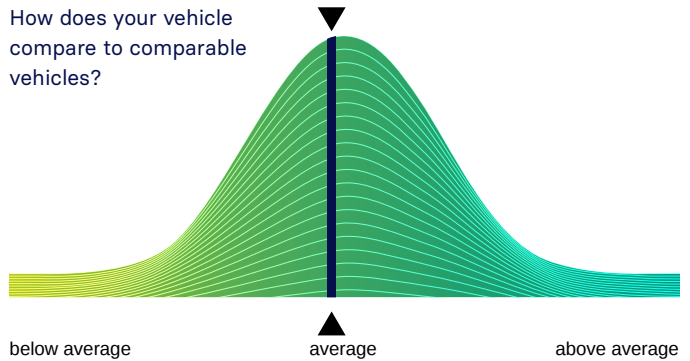

CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓



EVALUATION

GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

Marcus Berger

Dr. Marcus Berger, CEO



ENERGY

	Gross	Net (Nominal)	Usable
Current:	56.9kWh	56.9kWh	54.3kWh
New:	60.5kWh	60.5kWh	57.7kWh

RANGE

	WLTP	Typical	Individual
Current:	428-470km	325km	361km
New:	455-500km	345km	384km

EXECUTION PROTOCOL

AVILOO Box connected.	09:08:50
FLASH Test started.	✓
Vehicle detected.	✓
Starting data acquisition.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

BMS


	Value	Status
BMS State of Charge (SoC)*:	83%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	94%	
SoH calculation accuracy:		✓

MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	16.0°C	16.5°C	0.5°C	✓
Cell Voltage	3.304V	3.306V	2mV	✓
Pack Voltage	356.9V			
Average Current	-3.2A			

CELL VOLTAGES DIAGRAM

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305
21 - 40	3.305	3.305	3.306	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.304	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305
41 - 60	3.306	3.305	3.305	3.305	3.306	3.306	3.306	3.305	3.306	3.305	3.305	3.305	3.306	3.306	3.304	3.305	3.305	3.305	3.305	3.305
61 - 80	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305
81 - 100	3.305	3.304	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305
101 - 108	3.305	3.305	3.305	3.305	3.305	3.305	3.305	3.305	/	/	/	/	/	/	/	/	/	/	/	/

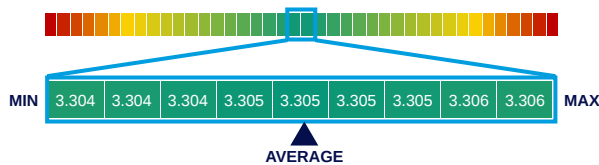

*The values shown here were read directly from the vehicle's battery management system (BMS) and are calculated and provided by the vehicle manufacturer. The State of Health (SoH) displayed corresponds to the value reported by the BMS and is CARA-certified.

DISCLAIMER: The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.